

LED SCREEN

- IP65 Waterproof / Full Color
- Multiple Installation Methods
- Indoor / Outdoor Advertising Display
- P1.25 / P2.5 / P3 / P4 / P5 / P6 / P8 / P10 Optional



Indoor LED Display Screen

Conference Rooms, Exhibition Halls, Studios, Halls, Bars, Classrooms, Hospitals, etc.



High Brightness



Wide Viewing Angle



4K HD



Seamless Stitching



Outdoor LED Display Screen

City Square, Pedestrian Street, Exchange Square, Airport, Station Public Places, etc.



Waterproof & Dust proof



Wide Viewing Angle



High Refresh Rate



High & Low Temperature Resistance

Flexible LED Display

HD display / Easy installation / Seamless stitching



LED Transparent Screen

High transparency / Excellent display / Ultra-lightweight





Lightweight



High Transparency



Customized Size



Simple Maintenance



HD Display



Quick Installation



Low Energy
Consumption



Waterproof

Multiple Installation Methods

The LED panel supports front and rear maintenance, and the installation and removal are very convenient.




Wall embedded



Wall mounted




Truck moving

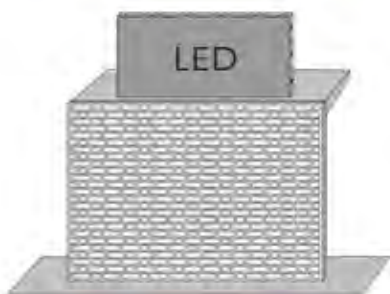

Building top



Hanging top

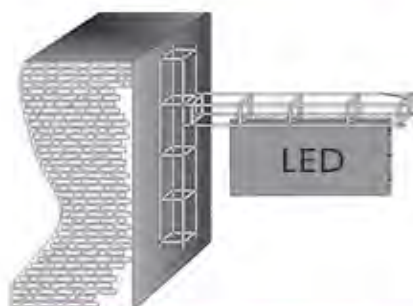

Cantilever hanging



Single pillar



Double Pillar



Side Pillar

Installation Methods For Flexible Led Display

01 cylindrical



Soft module



Cabinet



Install the soft module into the cabinet



Finished product

02 spherical



Soft module



Cabinet



Install the soft module into the cabinet



Finished product

03 special-shaped



Soft module



Cabinet



Install the soft module into the cabinet



Finished product

PRODUCT PARAMETER											
INDOOR SMALL PIXEL HD SERIES											
Type	P1.25	P1.5625	P1.667	P1.875	P1.923	P2	P2.5	P3	P4	P5	P6
Pixel Pitch	1.25	1.5625	1.667	1.875	1.923	2	2.5	3	4	5	6
Physical Density	640000pixels/m²	409600pixels/m²	360000pixels/m²	284444pixels/m²	270400pixels/m²	250000pixels/m²	160000pixels/m²	111111pixels/m²	62500pixels/m²	40000pixels/m²	27777pixels/m²
Brightness	≥900nits										2000-2200nits
Scanning Mode	1/30	1/32	1/30	1/30	1/30	1/32	1/32	1/32	1/16	1/16	1/8
LED Type	SMD1010	SMD1010	SMD1010	SMD1515	SMD1515	SMD1515	SMD2121	SMD2121	SMD2121	SMD2121	SMD3528
Module Size	150*168.75mm	150*168.75mm	200*150mm	150*168.75mm	200*150mm	256*128mm	160*160mm	192*192mm	256*128mm	320*160mm	192*192mm
Module Resolution	120*135pixels	96*128pixels	120*90pixels	128*96pixels	104*78pixels	128*64pixels	64*64pixels	64*64pixels	64*32pixels	64*32pixels	32*32pixels
Gray Scale	16bit										
Refresh Rate	≥3840										
Average Power	200w/m²					150w/m²					
Cabinet Size	600*337.5mm	600*337.5mm	400*300mm	600*337.5mm	400*300mm	512*512mm	480*480mm	576*576mm	512*512mm	640*640mm	768*768mm
Cabinet Weight	5.9kg	5.9kg	3kg	8.5kg	3kg	8kg	8kg	9kg	8kg	11kg	12kg
Cabinet Material	Die-casting Aluminum										
Input Voltage	AC110V-220V										
Protection Level	IP45	IP45	IP45	IP65	IP65	IP45	IP45	IP45	IP45	IP45	IP45
OUTDOOR SMALL PIXEL HD SERIES											
Type	P2.5	P3	P4	P5	P6	P8	P10	P12	P16		
Pixel Pitch	2.5	3	4	5	6	8	10	12	16		
Physical Density	160000pixels/m²	111111pixels/m²	62500pixels/m²	40000pixels/m²	27777pixels/m²	15625pixels/m²	10000pixels/m²	6944pixels/m²	3906pixels/m²		
Brightness	≥5000nits	≥5000nits	≥5500nits	≥5500nits	≥5500nits	≥5500nits	≥5500nits	≥5500nits	≥7000nits		
Scanning Mode	1/16	1/16	1/8	1/8	1/8	1/8	1/8	1/2	Static静态		
LED Type	SMD1415	SMD1921	SMD1921	SMD2727	SMD2727	SMD3535	SMD3535	SMD3535	SMD3535		
Module Size	150*168.75mm	150*168.75mm	200*150mm	150*168.75mm	200*150mm	256*128mm	160*160mm	192*192mm	256*128mm		
Module Resolution	64*64pixels	64*64pixels	64*32pixels	64*32pixels	32*32pixels	32*16pixels	32*16pixels	16*16pixels	16*16pixels		
Gray Scale	16bit										
Refresh Rate	≥3840										
Average Power	200w/m²										
Cabinet Size	480*480mm	576*576mm	768*768mm	960*960mm	960*960mm	1024*1024mm	960*960mm	960*960mm	1024*1024mm		
Cabinet Weight	10kg	12.5kg	30kg	40kg	40kg	43kg	40kg	40kg	43kg		
Cabinet Material	Water Proof Iron Cabinet Die-casting Aluminum										
Input Voltage	AC110V-220V										
Protection Level	IP65										
Type	Indoor Rental Series Parameter					Indoor Rental Series Parameter					
	P2.604	P2.97	P3.91	P4.81		P2.976	P3.91	P4.81	P5.95		
Pixel Pitch	2.604	2.97	3.91	4.81		2.976	3.91	4.81	5.95		
Physical Density	147456pixels/m²	112896pixels/m²	65536pixels/m²	43264pixels/m²		112896pixels/m²	65536pixels/m²	43264pixels/m²	28224pixels/m²		
Brightness	≥900nits					≥3500nits					
Scanning Mode	1/32	1月28日	1/16	1/13		1/28	1/16	1/13	1/7		
LED Type	SMD1515	SMD1515	SMD2121	SMD2121		SMD1921	SMD1921	SMD2727	SMD2727		
Module Size	250*250mm	250*250mm	250*250mm	250*250mm		200*150mm	200*150mm	200*150mm	200*150mm		
Module Resolution	96*96pixels	84*84pixels	64*64pixels	52*52pixels		84*84pixels	64*64pixels	52*52pixels	42*42pixels		
Gray Scale	16bit										
Refresh Rate	≥3840HZ										
Average Power	150w/m²					200w/m²					
Cabinet Size	500*500mm	500*500mm	500*500mm	500*500mm		500*500mm	500*500mm	500*500mm	500*500mm	500*500mm	
Cabinet Weight	8kg										
Cabinet Material	Die-casting Aluminum										4
Input Voltage	AC110V-220V										
Protection Level	IP45					IP65					

Application Case

- Indoor LED display



- Outdoor LED display



- Curved Splicing Optional



- Floor Screen Optional



Application Case



Application Case

